

DATE OF ISSUE: 2008.09.26

SPECIFICATION

MODEL: LED TUBE T8 Standard Type



CUSTOMER :-----

DRAWNED BY	CHECKED BY	APPROVED BY

SHENZHEN XINYIHAI CO., LTD.

Add:# Room 916, 10/F, Block North, International Business Building, Jiabing Road ShenZhen
China

[Http://www.ledmodulechina.com](http://www.ledmodulechina.com)

Email: sales@ledmodulechina.com

Tel: 0086-13266748568

Contents

1. Introduction & Product Feature -----	1
2. application & Outline Drawing -----	2
3. Basic Specification & Installation Instruction -----	3
4. Warranty & Notic -----	4
5. Test report -----	4

■ Introduction

LED Tube --Ideal for Fluorescent Replacement ,The high-quality SMD LEDs chip is adopted in Tube products . SMD LED Based Light Source , It provides special and professional SMTtechnology and testing . LED Tube can help us to keep Environmental green & Friendly, keeping high Energy-Efficient,

In order to provide high-quality lighting, we adopt high-performance CREE or COTCO SMT type LED from USA , which has obtained official patent license in the world, and can offer excellent electronic and optical features.

The LED TUBE can be widely applied as the lighting source to the General lighting , advertisement broads, marks and advertisement lamp boxes. It can also be used as the lighting source for decoration projects or stage lighting. It features high brightness, low power-loss, wide lighting angle, excellent quality and stable performance.

■ Feature


- 1) Light source: Hi-pot(4000v voltage) test passed, it's the first and only in china
- 2) Certification: UL(pending First in china), CE, ROHS
- 3) Output voltage DC36V for much more safe operation
- 4) Ambient Temperature: -40 ~ 60 degrees Celsius
- 5) Power Consumption: 18W
- 6) Diameter: 3cm, length: 120cm

- 7) Can be directly placed in conventional T8 or T9 fluorescent brackets, remove ballast and starter before replacement!
- 8) Solid-state, high shock / vibration resistant
- 9) Major reduction in power costs
- 10) No RF interference
- 11) Maintenance free, easy installation
- 12) Long lifetime 30, 000+ hrs (3+ years)
- 13) Low power consumption, high intensity

■ Application

Replacement for conventional fluorescent tubes

■ Dimension

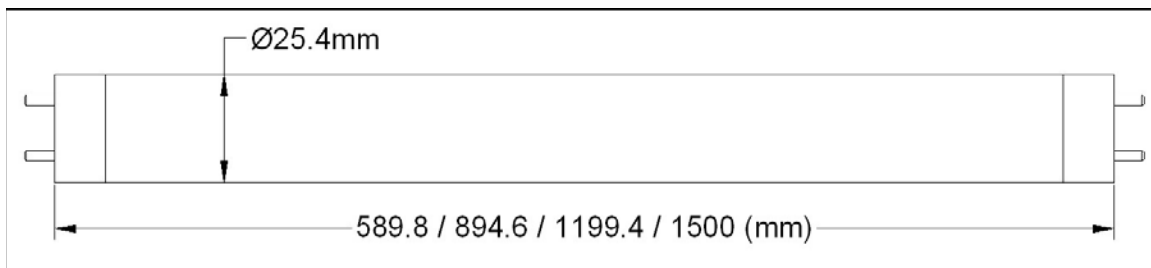

■ Basic specification

Part No. / Parameter	T8-150CM, T8-120CM, T8-90CM, T8-60CM			
Dimension(mm)	1500	1200	900	600
Main material	Aluminum	Aluminum	Aluminum	Aluminum
Power consumption(W)	22±10%	18 ±10%	14±10%	10±10%
Input current(mA)	100 ±5 %	83 ±5 %	65±5%	49±5%
Input voltage(V)	230	230	230	230
LED quantity(Pc)	250	200	150	100
LED type	SMD3020	SMD3020	SMD3020	SMD3020
Color	white	white	white	white
Luminous flux(Lm)	1500±10%	1200±10%	900±10%	600±10%
Color temperature(K)	5500-6500 (W)	5500-6500 (W)	5500-6500 (W)	5500-6500 (W)
Wattage of the unit LED(W)	0.07	0.07	0.07	0.07
Effection of the product	0.85	0.85	0.85	0.85
Power factor(PF)	0.97	0.97	0.97	0.97
Rendering index	80±5	80±5	80±5	80±5
Socket type	G13	G13	G13	G13
Life expectancy(h)	50000	50000	50000	50000

■ Installation Instruction

- 1) Input Voltage: AC110-240V
- 2) Output Voltage: DC36V
- 2) Working without ballast

■ Product Warranty


The validity of the product warranty is subject to the correct storage, installation, operation and maintenance of this product. Failing to comply with the storage, installation operation and maintenance routines will make the warranty invalid.

■ Notice

- 1) No pressing or striking
- 2) Transport and handle carefully
- 3) Pay attention to the voltage before using
- 4) Ambient temperature: 0°C - +50°C;
- 5) Indoor use only
- 6) No twisting when power is on

■ Testing report

Light Source Test Report

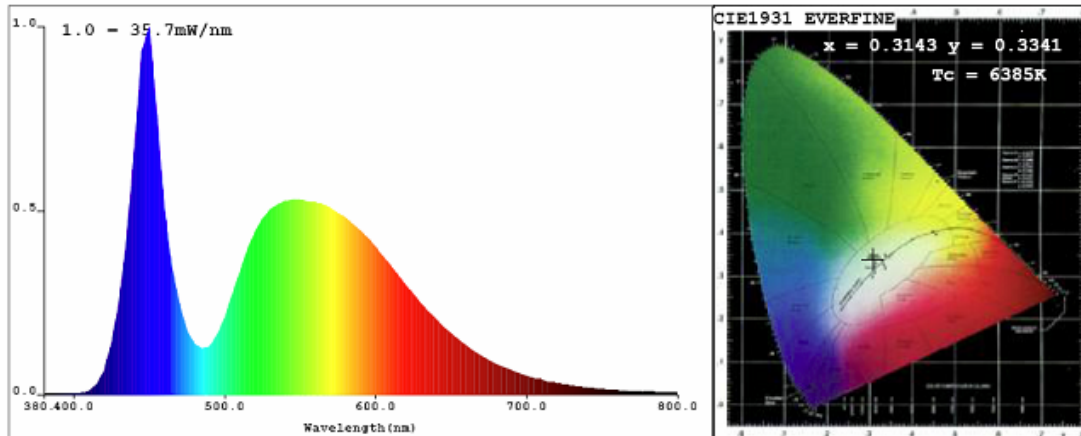

CIE Color Parameters:

Chromaticity Coordinate: $x=0.3143$ $y=0.3341$ $u=0.1970$ $v=0.3142$ ($duv=5.02e-00$)

CCT: $T_c=6385K$ Precp WaveL: $\lambda_d=492.3nm$ Purity=6.4%

Peak WaveL: $\lambda_p=450nm$ Half Width: $\Delta\lambda_p=23.6nm$ Ratio: R=12.1% G=83.9% B=3.9%

Average Wave: 543nm

Rendering Index: $R_a=72.4$

R1 =70 R2 =75 R3 =78 R4 =74 R5 =71 R6 =67 R7 =82 R8 =62

R9 =-26 R10=41 R11=71 R12=42 R13=70 R14=88 R15=66

Photo Parameters:

Flux: $\Phi=1192.9(lm)$ Luminous Efficacy: 67.75 (lm/W) Luminous Power: $P=3.492(W)$

Electrical Parameters:

$U=232.8V$ $I=0.0810A$ $P=17.60W$ $PF=0.930$

Instrument Status:

Scan Range: 380.0nm-800.0nm

Interval: 5.0nm

$I_p = 40490(G=4,D=51)$


REF - 55332

TMP (PMT) - 22.0degrees centigrade Test Mode: Fast Test

Product Type: t8-120cm
Instrument: PMS-50 System
Temperature: 22.8deg
Test Operator: JACK-DO

Manufacturer: QUASAR
Test Department: QUASAR
Humidity: 65.0%
Test Date: 2008-11-21 11:03

Light Source Test Report

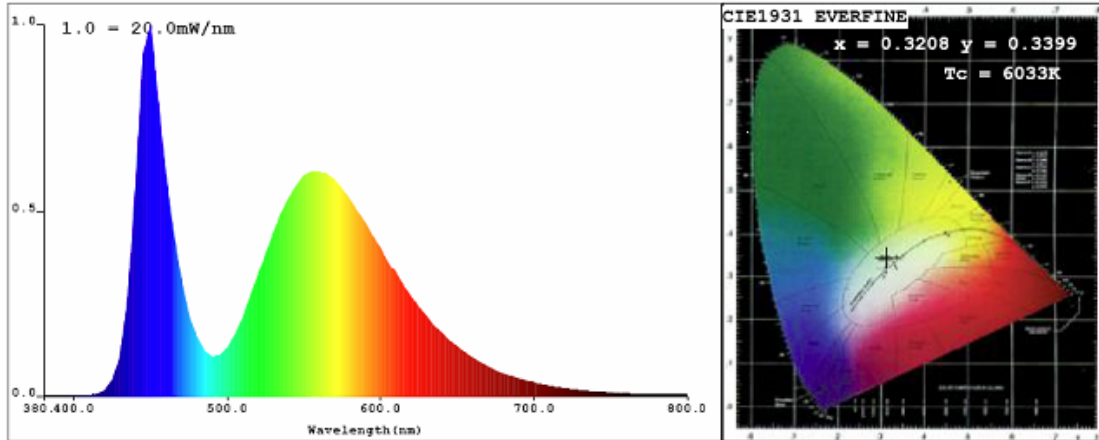

CIE Color Parameters:

Chromaticity Coordinate: $x=0.3208$ $y=0.3399$ $u=0.1994$ $v=0.3168$ ($duv=4.76e-003$)

CCT: $T_c=6033K$ Prcp WaveL: $\lambda_d=498.5nm$ Purity=3.9%

Peak WaveL: $\lambda_p=450nm$ Half Width: $\Delta\lambda_p=24.1nm$ Ratio: R=11.1% G=85.1% B=3.8%

Average Wave: 547nm

Rendering Index: $R_a=63.6$

R1 =58 R2 =71 R3 =77 R4 =60 R5 =59 R6 =58 R7 =79 R8 =47

R9 =-70 R10=28 R11=50 R12=26 R13=60 R14=87 R15=54

Photo Parameters:

Flux: $\Phi=633.48(lm)$ Luminous Efficacy: 63.35(lm/W) Luminous Power: $P=1.851(W)$

Electrical Parameters:

$U=227.5V$ $I=0.0480A$ $P=10.00W$ $PF=0.948$

Instrument Status:

Scan Range: 380.0nm-800.0nm

Interval: 5.0nm

$I_p = 19922(G=4,D=51)$

REP - 31257

TMP(PMT) - 23.2degrees centigrade Test Mode: Fast Test

Product Type:
Instrument: PMS-50 System
Temperature: 25.0deg
Test Operator: JACK-DO

Manufacturer: QUASAR
Test Department: QUASAR
Humidity: 65.0%
Test Date: 2008-11-10 10:24